
**Series 1 freight containers —
Specification and testing —**

Part 3:

**Tank containers for liquids, gases and
pressurized dry bulk**

Conteneurs de la série 1 — Spécifications et essais —

*Partie 3: Conteneurs-citernes pour les liquides, les gaz et les produits
solides en vrac pressurisés*





COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

| | |
|---|----------|
| Foreword | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Dimensions and ratings | 2 |
| 4.1 External dimensions | 2 |
| 4.2 Ratings | 2 |
| 5 Design requirements | 2 |
| 5.1 General | 2 |
| 5.2 Corner fittings | 3 |
| 5.2.1 General | 3 |
| 5.2.2 Doubler plates | 3 |
| 5.3 Base structure | 3 |
| 5.4 End structure | 4 |
| 5.5 Side structure | 4 |
| 5.6 Tank | 4 |
| 5.6.1 Design and construction | 4 |
| 5.6.2 Corrosion allowance | 4 |
| 5.6.3 Tank openings | 4 |
| 5.6.4 Pressure and vacuum relief devices | 5 |
| 5.6.5 Inspection and maintenance openings | 6 |
| 5.6.6 Gauging devices | 6 |
| 5.6.7 Sealing (customs requirements) | 6 |
| 5.7 Optional features | 6 |
| 5.7.1 Gooseneck tunnels | 6 |
| 5.7.2 Walkways | 6 |
| 5.7.3 Ladders | 6 |
| 5.7.4 Tank insulation | 6 |
| 5.7.5 Tank heating and refrigeration | 7 |
| 6 Testing | 7 |
| 6.1 General | 7 |
| 6.2 Test No. 1 — Stacking | 8 |
| 6.2.1 General | 8 |
| 6.2.2 Procedure | 8 |
| 6.2.3 Requirements | 8 |
| 6.3 Test No. 2 — Lifting from the four top corner fittings | 9 |
| 6.3.1 General | 9 |
| 6.3.2 Procedure | 9 |
| 6.3.3 Requirements | 9 |
| 6.4 Test No. 3 — Lifting from the four bottom corner fittings | 9 |
| 6.4.1 General | 9 |
| 6.4.2 Procedure | 9 |
| 6.4.3 Requirements | 10 |
| 6.5 Test No. 4 — External restraint (longitudinal) | 10 |
| 6.5.1 General | 10 |
| 6.5.2 Procedure | 10 |
| 6.5.3 Requirements | 10 |
| 6.6 Test No. 5 — Internal restraint (longitudinal) (dynamic) | 10 |
| 6.6.1 General | 10 |
| 6.6.2 Procedure | 10 |
| 6.6.3 Requirements | 10 |
| 6.7 Test No. 6 — Internal restraint (lateral) | 10 |

| | | |
|---|---|-----------|
| 6.7.1 | General..... | 10 |
| 6.7.2 | Procedure..... | 11 |
| 6.7.3 | Requirements..... | 11 |
| 6.8 | Test No. 7 — Rigidity (transverse)..... | 11 |
| 6.8.1 | General..... | 11 |
| 6.8.2 | Procedure..... | 11 |
| 6.8.3 | Requirements..... | 11 |
| 6.9 | Test No. 8 — Rigidity (longitudinal)..... | 12 |
| 6.9.1 | General..... | 12 |
| 6.9.2 | Procedure..... | 12 |
| 6.9.3 | Requirements..... | 12 |
| 6.10 | Test No. 9 — Load-transfer area test..... | 12 |
| 6.10.1 | General..... | 12 |
| 6.10.2 | Procedure..... | 12 |
| 6.10.3 | Requirements..... | 12 |
| 6.11 | Test No. 10—Walkways (where provided)..... | 13 |
| 6.11.1 | General..... | 13 |
| 6.11.2 | Procedure..... | 13 |
| 6.11.3 | Requirements..... | 13 |
| 6.12 | Test No. 11 — Ladders (where provided)..... | 13 |
| 6.12.1 | General..... | 13 |
| 6.12.2 | Procedure..... | 13 |
| 6.12.3 | Requirements..... | 13 |
| 6.13 | Test No. 12 — Pressure test..... | 13 |
| 6.13.1 | General..... | 13 |
| 6.13.2 | Procedure..... | 13 |
| 6.13.3 | Requirements..... | 14 |
| 7 | Identification and marking..... | 14 |
| Annex A (normative) Diagrammatic representation of capabilities appropriate to all types and sizes of tank containers, except where otherwise stated | | 15 |
| Annex B (normative) Dynamic longitudinal impact test..... | | 19 |
| Bibliography | | 25 |

.....

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 104, *Freight containers*, Subcommittee SC 2, *Specific purpose containers*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

This fifth edition cancels and replaces the fourth edition (ISO 1496-3:1995) which has been technically revised. It also incorporates the Amendment ISO 1496-3:1995/Amd 1:2006. The main changes compared to the previous edition are as follows:

- the container type codes have been revised in accordance to ISO 6346;
- the ratings and stacking forces have been revised in accordance to ISO 668;
- the load transfer areas of base structure have been referenced to ISO 668;
- the stacking test no. 1 ratings have been revised in accordance with ISO 668;
- the insulation thermal test has been referenced to ISO 1496-2.

A list of all parts in the ISO 1496 series can be found on the ISO website.

Series 1 freight containers — Specification and testing —

Part 3:

Tank containers for liquids, gases and pressurized dry bulk

1 Scope

This document specifies the basic specifications and testing requirements for ISO series 1 tank containers suitable for the carriage of gases, liquids and solid substances (dry bulk) which can be loaded or unloaded as liquids by gravity or pressure discharge, for international exchange and for conveyance by road, rail and sea, including interchange between these forms of transport.

Except where otherwise stated, the requirements of this document are minimum requirements.

The container types covered by this document are given in [Table 1](#).

Table 1 — Container types (in accordance with ISO 6346:1995/Amd 3:2012, Table E1)

| Code | Type designation | Type group code |
|------|---|-----------------|
| K | Pressurized tank containers (liquids and gases) | KL |
| N | Pressurized and non-pressurized tank containers (dry) | NH |
| | | NN |
| | | NP |

The marking requirements for these containers are given in ISO 6346.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 668, *Series 1 freight containers — Classification, dimensions and ratings*

ISO 830, *Freight containers — Vocabulary*

ISO 1161, *Series 1 freight containers — Corner fittings — Specification*

ISO 6346, *Freight containers — Coding, identification and marking*

ISO 6487, *Road vehicles — Measurement techniques in impact tests — Instrumentation*

EN 13374, *Temporary edge protection systems — Product specification — Test methods*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 830 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

4 Dimensions and ratings

4.1 External dimensions

The overall external dimensions and tolerances of tank containers covered by this document shall be those established in ISO 668. If tank containers are of reduced height, they shall be designated 1AX, 1BX, 1CX and 1DX. No part of the tank container, its associated fittings and/or equipment shall project beyond these specified overall external dimensions.

4.2 Ratings

The values of the rating, R , being the gross mass of the container, shall be those specified in ISO 668.

5 Design requirements

5.1 General

5.1.1 All tank containers shall be capable of fulfilling the following requirements for the framework, the design and construction of the tank and any optional provisions.

5.1.2 The ability of the tank container to withstand the specified design loadings shall be established by calculation or test.

5.1.3 The strength requirements for tank containers are given in diagrammatic form in ISO 668 (these requirements are applicable to all tank containers as complete units except where otherwise stated).

5.1.4 The strength requirements for corner fittings (see also [5.2](#)) are specified in ISO 1161.

5.1.5 The tank container shall be capable of withstanding the test loads and loadings specified in this document.

5.1.6 Each tank container shall be designed to withstand the effects of inertia of the tank contents resulting from transport motions. For design purposes, these effects may be taken to be equivalent to loadings of $2Rg$ longitudinally, Rg laterally and $2Rg$ vertically (see Note in [6.1.1](#)). These loadings may be considered individually to be evenly distributed and to act through the geometric centre of the tank. Vertical loadings are total loadings including dynamic effects. It should be noted that the above loadings do not give rise to an increase in pressure in the vapour space. For design purposes, an equivalent pressure loading may be used.

5.1.7 Each tank container shall be capable of withstanding the requirements of [5.1.5](#) and the static head produced in the tank container while loaded to its rating, R . Due regard shall be given to the liquid/dry bulk of highest density that is to be carried and to any compartmentation of the tank.

5.1.8 As the effects of loads encountered under any dynamic operating condition should only approach, but not exceed, the effects of the corresponding test loads, it is implicit that the capabilities of tank containers indicated in ISO 668 and demonstrated by the tests described in this document shall not be exceeded in any mode of operation.

5.1.9 Any closure in a tank container, which if unsecured could lead to a dangerous situation, shall be provided with an adequate securing system having, so far as can be practicable, external indication of the positive securement of that closure in the appropriate operating position.

5.1.10 Fork-lift pockets shall not be provided in tank containers except, if required to container designation 1D, 1DX.

NOTE Fork-lift transport of tank containers is considered dangerous because of stability problems with loaded or partly-loaded tanks and the danger of impact damage from the forks of fork-lift trucks.

5.1.11 The tank container and its service equipment materials shall be suitable for, or adequately protected from, the cargo and the environment in which the tank container can be operated. Due regard should be given to the problems of variation in ambient temperature, corrosive atmospheres, the possibility of uncontrolled cargo release in fire, etc.

5.1.12 The design of tank containers designated 1AAA and 1BBB shall take into special account the problems of the dynamic instability of these containers, compared with 1AA and 1BB tank containers, when operating in the road/rail environment in a partially laden condition.

5.2 Corner fittings

5.2.1 General

All tank containers shall be equipped with top and bottom corner fittings. The requirements and positioning of the corner fittings are given in ISO 1161 and ISO 668. The upper faces of the top corner fittings shall protrude above the top of all other components of the tank container by a minimum of 6 mm (see 5.3.5).

5.2.2 Doubler plates

Whenever reinforced zones or doubler plates are provided to afford protection in the vicinity of the top corner fittings, such plates and their securements shall not protrude above the upper faces of the top corner fittings. These plates shall not extend more than 750 mm from either end of the container but may extend the full width.

5.3 Base structure

5.3.1 All tank containers shall be capable of being supported by their bottom corner fittings only.

5.3.2 All tank containers, other than 1CC, 1C, 1CX, 1D and 1DX, shall be capable of being supported only by load-transfer areas in their base structure. 1CC, 1C and 1CX tank containers can have intermediate load-transfer areas as an optional feature. If so, these tank containers shall meet the requirements in 5.3.3, 5.3.4 and ISO 668.

5.3.3 Consequently, these tank containers shall have end transverse members and sufficient intermediate load-transfer areas (or a flat underside) of sufficient strength to permit vertical load transfer to or from the longitudinal members of a carrying vehicle, which are assumed to lie within the two 350 mm wide zones defined by ISO 668.

Special consideration shall be given in the base structure design to the risk of failure from fatigue.

5.3.4 The lower faces of the load-transfer areas in the container base structure, including those of the end transverse members, shall lie in one plane located $12,5_{-1,5}^{+5}$ mm above the plane of the lower faces of the bottom corner fittings of the tank container (base plane). Apart from the bottom corner fittings and bottom side rails, no part of the container shall project below this plane. However, doubler plates may be provided in the vicinity of the bottom corner fitting to afford protection to the under-structure. Such plates shall not extend more than 550 mm from the outer end and not more than 470 mm from the side faces of the bottom corner fittings, and their lower faces shall be at least 5 mm above the lower faces of the base plane of the container.

5.3.5 The transfer of load between the underside of any bottom side rails which may be fitted and carrying vehicles is not envisaged.

5.3.6 Load-transfer area requirements are given in [Annex B](#).

5.3.7 For 1D and 1DX tank containers, the level of the underside of the base structure is not specified, except insofar as it is implied in [5.3.4](#) and [5.3.5](#).

5.3.8 When the tank container is loaded to its rating, R , no part of the tank or its associated shell fittings shall project downwards below a plane situated 25 mm above the base plane (bottom faces of the bottom corner fittings).

5.3.9 For tank containers under dynamic conditions, or the static equivalent thereof, with the tank container loaded in such a way that the combined mass of the tank container and test load is equal to $1,8R$, no part of the base of the tank container shall deflect more than 6 mm below the base plane (bottom faces of the bottom corner fittings).

5.4 End structure

For tank containers other than 1D and 1DX, the sideways deflection of the top of the tank container with respect to the bottom of the tank container at the time it is under full transverse rigidity test conditions (see [6.8](#)) shall not cause the sum of the changes in length of the two diagonals to exceed 60 mm.

5.5 Side structure

For tank containers other than 1D and 1DX, the longitudinal deflection of the top of the tank container with respect to the bottom of the tank container at the time it is under full longitudinal rigidity test conditions (see [6.9](#)) shall not exceed 25 mm.

5.6 Tank

5.6.1 Design and construction

5.6.1.1 Each tank or compartment thereof shall be designed and constructed to good technical practice.

5.6.1.2 Each tank or tanks shall be firmly secured to structural elements of the tank framework. The tank or tanks shall be capable of being filled and emptied without removal from the framework.

5.6.1.3 Tanks or tank compartments without vacuum relief devices shall be designed to withstand an external pressure of at least 40 kPa above the internal pressure.

Tanks equipped with vacuum relief devices shall be designed to withstand an external overpressure of 21 kPa or greater.

5.6.2 Corrosion allowance

In addition to the requirements of [5.1.10](#), an allowance for corrosion shall be taken into consideration where necessary.

5.6.3 Tank openings

5.6.3.1 All tank openings except those fitted with pressure relief devices shall be provided with adequate closures to prevent accidental escape of the contents.

5.6.3.2 Tank nozzles and outlet fittings shall be substantially made and attached to the tank in such a way as to minimize the risk of breakage. Protective covers or housings shall be used wherever necessary to comply with this requirement.

Wherever possible, hinged device should be fitted so that they open away from the likely vicinity of any personnel.

5.6.3.3 Any tank opening located below the normal level of the contents and fitted with a valve capable of being operated manually shall be provided with an additional means of closure on the outlet side of the valve. Such additional means of closure can be a contents-tight cap, bolted blank flange, or other suitable protection against accidental escape of the contents. All valves, whether fitted internally or externally, shall be located as close to the tank shell as practicable.

5.6.3.4 Stop valves with screwed spindles shall be closed by clockwise motion of the handwheel.

5.6.3.5 All tank connections, such as nozzles, outlet fittings and stop valves, shall be clearly marked to indicate their appropriate functions.

5.6.4 Pressure and vacuum relief devices

5.6.4.1 Each tank or compartment thereof intended to carry non-dangerous cargo shall be fitted with a pressure relief device set to be fully open at a pressure not greater than the tank's test pressure, to prevent excessive internal overpressure. Such devices shall be connected to the vapour space of the tank and located as near to the top of the tank and as near to the tank's (or tank compartment's) mid-length as practicable.

In cases where the tank container is used with both dangerous and non-dangerous cargo, the relief devices shall be set in accordance with [5.6.4.3](#).

5.6.4.2 Pressure relief devices, installed as required in [5.6.4.1](#), should have a minimum relief capacity of 0,05 m³/s of standard air (an absolute pressure of 100 kPa at 15 °C).

This may be considered as providing overpressure protection under non-emergency conditions, but should not be considered as adequate protection for a tank container, or compartment thereof, against excessive overpressure under full fire exposure conditions, dry bulk dust explosion or higher dry bulk pressurization.

5.6.4.3 Tanks, or a compartment thereof, intended for the carriage of dangerous goods shall be provided with appropriate pressure relief.

5.6.4.4 Each pressure relief device shall be plainly and permanently marked with the pressure at which it is set to operate.

5.6.4.5 A tank container, or a compartment thereof, with an external design pressure of less than 40 kPa shall be equipped with a vacuum relief device set to relieve at an absolute pressure of 79 kPa, except that a lower absolute setting may be used, provided that the external design pressure is not exceeded. The vacuum relief device shall have a minimum through area of 284 mm². The use of combination pressure/vacuum relief devices is allowed.

NOTE The above requirements are intended to protect against collapse of the tank or compartment thereof, during conditions of normal ambient temperature variations. They do not necessarily prevent collapse if a tank, or a compartment thereof, is, for example, closed tightly immediately after steam cleaning or discharged without adequate venting.

5.6.5 Inspection and maintenance openings

Tank containers shall be provided with openings to allow for complete internal inspection. The openings shall be fitted with pressure tight closures.

The size of openings shall be a minimum of 500 mm in diameter and shall be determined by the need for personnel and machines to enter the tank to inspect, maintain or repair the inside.

5.6.6 Gauging devices

Gauging devices which can be in direct communication with the contents of the tank shall be made of a material that is compatible with the tank and its contents.

5.6.7 Sealing (customs requirements)

Adequate provision shall be made for the sealing of the tank.

5.7 Optional features

5.7.1 Gooseneck tunnels

Gooseneck tunnels shall be provided as mandatory features in 1AAA tank containers and may be provided as optional features in 1AA, 1A and 1AX tank containers. The dimensional requirements are specified in ISO 668; all other parts of the base structure shall be as specified in 5.3.

5.7.2 Walkways

Where provided, walkways shall be designed to withstand a loading of not less than 3 kN uniformly distributed over an area of 600 mm × 300 mm. Longitudinal walkways shall have a minimum width of 460 mm.

Walkway guard rails are not recommended as an alternative to installed on-site working at height fall protection systems. If a guard rail is fitted to the tank container walkway, the guard rail, when not in use, shall be designed to be stored and adequately secured for transport, within the tank ISO dimensions and tested to applicable provisions of EN 13374 temporary edge protection systems.

5.7.3 Ladders

Where provided, ladders shall be designed to withstand a load of 200 kg on any rung. The ladder shall be constructed with two stiles and a minimum width of 300 mm. Rungs shall be uniformly spaced between 280 mm to 300 mm apart and the top surface shall be designed to be non-slip. A hand-hold shall be fitted adjacent to the top of the ladder to allow for easier transition from ladder to walkway and vice-versa.

5.7.4 Tank insulation

When thermal insulation is provided, the design and construction shall be such that the insulation does in no way impinge on the specified requirements nor interfere with the proper function of the tank fittings. Insulation, adhesives and fittings in contact with the tank shall be of compatible materials and designed not to cause any detrimental condition to the tank such as stress corrosion, corrosion pitting or electrolytic action.

Where required, a heat leakage test should be carried out to establish the heat leakage for the thermal tank container. The test should be in accordance with ISO 1496-2:2018, 8.3.

Due regard shall be given to the requirements of 5.1.11.

5.7.5 Tank heating and refrigeration

When heating or refrigeration is provided, due consideration shall be given to the safety of the tank and its contents. Suitable safeguards shall be provided to avoid the development of excessive temperature and stresses.

6 Testing

6.1 General

6.1.1 Unless otherwise stated, tank containers complying with the design and construction requirements specified in [Clause 5](#) shall, in addition, be capable of withstanding the tests specified in [6.2](#) to [6.11](#) and [Annex A](#). The pressure test (test No. 12) shall be applied to every tank container and shall, where practicable, be carried out last if other tests are to be performed.

Dynamic tests in [6.6](#) shall be conducted in accordance with the procedure specified in [Annex B](#).

6.1.2 The symbol P denotes the maximum payload of the container to be tested [see [Formula \(1\)](#)]:

$$P = R - T \quad (1)$$

where

R is the rating;

T is the tare.

The symbol W denotes the container payload with the total capacity filled with water.

NOTE R , P , T and W , by definition, are in units of mass. Where test requirements are based on the gravitational forces derived from these values, those forces, which are inertial forces, are indicated thus: Rg , Pg , Tg , Wg the units of which are in Newtons or multiples thereof.

The word “load”, when used to describe a physical quantity to which units may be attributed, implies mass. The word “loading”, for example, as in “internal loading”, implies force.

6.1.3 The tank container under test, unless otherwise stated, shall be loaded with a suitable fluid/dry bulk to achieve the test load or loading specified.

If the test load or loading cannot readily be met by the above method, or if such a method is undesirable, the tank container shall be loaded with a suitable fluid/dry bulk and a supplementary load or loading shall be applied. The total load or loading thus applied shall be such as to simulate uniform loading.

Variations of 20 % of the calculated bending moment diagrams of the uniformly loaded tank container shall be considered acceptable.

6.1.4 The test loads and loadings specified for all the following tests are minimum requirements.

6.1.5 The dimensional requirements to which reference is made in the requirements clause after each test are those specified in:

- a) the dimensional and design requirements of [Clauses 4](#) and [5](#);
- b) ISO 668;
- c) ISO 1161.

6.2 Test No. 1 — Stacking

6.2.1 General

This test shall be carried out to prove the ability of a tank container to support a superimposed mass of containers, taking into account conditions aboard ships at sea and the relative eccentricities between superimposed containers.

Table 2 specifies the force to be applied as a test to each pair of corner fittings and the superimposed mass that the test force represents.

6.2.2 Procedure

The tank container, filled completely with water, shall be placed on four level pads, one under each bottom corner fitting.

The pads shall be centralized under the fittings and shall be substantially of the same plan dimensions as the fittings.

The tank container shall be subjected to test forces applied either to all four corner fittings simultaneously, or to each pair of end corner fittings, at the appropriate level specified in Table 2.

The forces shall be applied through a test fixture equipped with corner fittings as specified in ISO 1161, or equivalent fittings which have imprints of the same geometry (i.e. with the same external dimensions, chamfered aperture and rounded edges) as the bottom face of the bottom corner fitting specified in ISO 1161. If equivalent fittings are used, they shall be designed to produce the same effect on the container under test loads as when corner fittings are used.

In all cases, the forces shall be applied in such a manner that rotation of the planes through which the forces are applied and on which the container is supported, is minimized.

Each corner fitting or equivalent fitting shall be offset in the same direction by 25,4 mm laterally and 38 mm longitudinally.

In the case of tank containers with identical ends, only one end need be tested.

Table 2 — Forces to be applied in stacking test

| Container designation | Test force per container (all four corners simultaneously) | | Test force per pair of end fittings | | Superimposed mass represented by test force | |
|------------------------------|---|---------|--|---------|---|---------|
| | kN | lbf | kN | lbf | kg | lb |
| 1 EEE 1EE | 3 767 | 846 854 | 1 883 | 423 317 | 213 360 | 470 380 |
| 1AAA, 1AA, 1A and 1AX | 3 767 | 846 854 | 1 883 | 423 317 | 213 360 | 470 380 |
| 1BBB, 1BB, 1B and 1BX | 3 767 | 846 854 | 1 883 | 423 317 | 213 360 | 470 380 |
| 1CC, 1C and 1CX | 3 767 | 846 854 | 1 883 | 423 317 | 213 360 | 470 380 |
| 1D and 1DX | 896 | 201 600 | 448 | 100 800 | 50 800 | 112 000 |

NOTE See ISO 1496-1 for the specification of stacking loads for 1EE/1EE containers in different modes.

6.2.3 Requirements

On completion of the test, the tank container shall neither show leakage or permanent deformation which will render it unsuitable for use or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.3 Test No. 2 — Lifting from the four top corner fittings

6.3.1 General

This test shall be carried out to prove the ability of a tank container, other than a 1D or a 1DX container, to withstand being lifted from the four top corner fittings with the lifting forces applied vertically, and the ability of a 1D or 1DX tank container to withstand being lifted from the four top corner fittings with the lifting forces applied at any angle between the vertical and 60° to the horizontal. These are the only recognized ways of lifting tank containers by the four top corner liftings.

This test shall also be regarded as proving the ability of the tank container to withstand the forces arising from acceleration of the payload in lifting operations.

6.3.2 Procedure

The tank container under test shall be loaded in such a way that the combined mass of tank container and test load is equal to $2R$ (see 6.1.2) and it shall be carefully lifted from all four top corners in such a way that no significant acceleration or deceleration forces are applied.

For a tank container other than 1D or 1DX, the lifting forces shall be applied vertically.

For a 1D or 1DX tank container, lifting shall be by means of slings, the angle of each leg being at 60° to the horizontal.

After lifting, the tank container shall be suspended for 5 min and then lowered to the ground.

6.3.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.4 Test No. 3 — Lifting from the four bottom corner fittings

6.4.1 General

This test shall be carried out to prove the ability of a tank container to withstand being lifted from its four bottom corner fittings by means of lifting devices bearing on the bottom corner fittings only and attached to a single transverse central spreader beam above the container.

6.4.2 Procedure

The tank container under test shall be loaded in such a way that the combined mass of tank container and test load is equal to $2R$ (see 6.1.2), and shall be carefully lifted from the side apertures of all four bottom corner fittings in such a way that no significant acceleration or deceleration forces are applied.

Lifting forces shall be applied at:

- 30° to the horizontal for 1AAA, 1AA, 1A and 1AX tank containers;
- 37° to the horizontal for 1BBB, 1BB, 1B and 1BX tank containers;
- 45° to the horizontal for 1CC, 1C and 1CX tank containers;
- 60° to the horizontal for 1D and 1DX tank containers.

In each case, the line of action of the lifting force and the outer face of the corner fitting shall not be further apart than 38 mm. The lifting shall be carried out in such a manner that the lifting devices bear on the four bottom corner fittings only.

The tank container shall be suspended for 5 min and then lowered to the ground.

6.4.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.5 Test No. 4 — External restraint (longitudinal)

6.5.1 General

This test shall be carried out to prove the ability of a tank container to withstand longitudinal external restraint under dynamic conditions or railway operation, which implies accelerations of 2 g.

6.5.2 Procedure

The tank container shall be loaded in such a way that the combined mass of tank container and test load is equal to R (see 6.1.2), and shall be secured, longitudinally to rigid anchor points through the bottom apertures of the bottom corner fittings at one end of the tank container.

A force of $2R$, g shall be applied horizontally to the tank container through the bottom apertures of the other bottom corner fittings, first towards and then away from the anchor points.

6.5.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.6 Test No. 5 — Internal restraint (longitudinal) (dynamic)

6.6.1 General

This test shall be carried out to prove the ability of tank containers to withstand longitudinal internal restraint under dynamic conditions of railway operation.

6.6.2 Procedure

This test shall be conducted in accordance with the procedure specified in [Annex B](#).

6.6.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality that will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.7 Test No. 6 — Internal restraint (lateral)

6.7.1 General

Separate tests shall be carried out to prove the ability of the tank container to withstand the effects of the inertia of the tank contents both on the tank itself and the tank-to-framework connections under the conditions of lateral acceleration envisaged in 5.1.

NOTE 1 The effects of vertical acceleration are deemed to be covered by tests Nos. 2 and 3.

NOTE 2 Containers without longitudinal frames are deemed to be covered by test No. 4.

6.7.2 Procedure

The tank container shall be loaded in such a way that the combined mass of the tank container and test load is equal to R .

The tank container shall be positioned with its transverse axis vertical (a tolerance of 3° is acceptable). It shall be held in this position for 5 min by means of supports either:

- a) at the lower end of the base structure of the tank container acting only through the two bottom corner fittings given both vertical and horizontal securement, and by means of anchor devices acting through the corner fittings at the upper end of the base structure in such a manner as to provide horizontal restraint only; or
- b) under the four downward-facing corner fittings.

Procedure b) may be used only for those types of tank containers where the tank is supported solely by the base structure of the container or where, in the opinion of the competent authority, the tank container is adequately tested with respect to tank-to-framework connections by tests Nos. 4 and 8.

6.7.3 Requirements

On completion of the tests, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.8 Test No. 7 — Rigidity (transverse)

6.8.1 General

This test shall be carried out to prove the ability of a tank container, other than a 1D or a 1DX container, to withstand the transversal racking forces resulting from ship movement.

6.8.2 Procedure

The tank container in tare condition, T , shall be placed on four level supports, one under each corner fitting, and shall be restrained against lateral and vertical movement by means of anchor devices acting through the bottom apertures of the bottom corner fittings. Lateral restraint shall be provided only at a bottom corner fitting diagonally opposite to and in the same end frame as a top corner fitting to which force is applied.

When testing the two end frames separately, vertical restraint need only be applied at the end frame under test.

Forces of 150 kN shall be applied either separately or simultaneously to each of the top corner fittings on one side of the tank container in lines parallel both to the base and to the planes of the ends of the tank container. The forces shall be applied first towards and then away from the top corner fittings.

In the case of tank containers with identical ends, only one end need be tested. Where an end is not essentially symmetrical about its own vertical centreline, both sides of that end shall be tested.

For allowable deflection under full test loading, see 5.4.

6.8.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.9 Test No. 8 — Rigidity (longitudinal)

6.9.1 General

This test shall be carried out to prove the ability of a tank container, other than a 1D or a 1DX container, to withstand the longitudinal racking forces resulting from ship movement.

6.9.2 Procedure

The tank container in tare condition, T , shall be placed on four level supports, one under each corner fitting, and shall be restrained against longitudinal and vertical movement by means of anchor devices acting through the bottom apertures of the bottom corner fittings. Longitudinal restraint shall be provided only at a bottom corner fitting diagonally opposite and in the same side frame as a top corner fitting to which the force is applied.

Forces of 75 kN shall be applied either separately or simultaneously to each of the top corner fittings on one end of the tank container in lines parallel both to the base of the tank container and to the planes of the sides of the tank container. The force shall be applied first towards and then away from the top corner fittings.

In the case of a tank container with identical sides, only one side need be tested. Where a side is not essentially symmetrical about its own vertical centreline, both ends of that side shall be tested.

For allowable deflections under full test loadings, see [5.5](#).

6.9.3 Requirements

On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.10 Test No. 9 — Load-transfer area test

6.10.1 General

This test shall be carried out to simulate, statically, the known dynamic condition when the load-transfer areas are only partially in contact with the carrying vehicle, within the space provided between the twist-lock and the bottom corner fitting. This test only confirms the strength of the structure in relation to static load-carrying ability.

6.10.2 Procedure

The tank container shall be loaded in such a way that the combined mass of the tank container and test load is equal to $2R$, and it shall be supported by means of four supports, each with a supporting area of 150 mm × 150 mm. The supports shall be positioned at the inner ends of the allowable transverse support area.

The tank container shall remain supported in this way for a minimum of 5 min.

Repeat the test with the supports positioned at the outer ends of the allowable transverse support area.

In the case of tank containers with symmetrical load-transfer areas, only one end need be tested. Where the load-transfer areas are not symmetrical, both ends shall be tested.

6.10.3 Requirements

Upon completion of the test, the tank container shall not show leakage, permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

6.11 Test No. 10—Walkways (where provided)

6.11.1 General

This test shall be carried out on all walkways, where provided on a tank container, to prove the ability of the walkway to withstand the loads imposed by persons working thereon.

6.11.2 Procedure

A concentrated load of not less than 300 kg shall be uniformly distributed over an area of 600 mm × 300 mm located at the weakest area of the walk-way.

6.11.3 Requirements

On completion of the test, the walkways shall show neither undue deformation nor any abnormality which renders them unsuitable for use.

6.12 Test No. 11 — Ladders (where provided)

6.12.1 General

This test shall be carried out on all ladders, where provided on a tank container, to prove the ability of the ladder to withstand the loads imposed by persons working thereon.

6.12.2 Procedure

A load of 200 kg shall be positioned at the centre 50 mm of the widest rung.

6.12.3 Requirements

On completion of the test, the ladders shall show neither undue deformation nor abnormality which would render them unsuitable for use.

6.13 Test No. 12 — Pressure test

6.13.1 General

This test shall be carried out on every tank container to prove the ability of the tank to withstand the specified internal pressure. Where practicable, it shall be carried out last if other tests are to be performed, but before the addition of thermal insulation, if any.

Shot-blasting or other preparation normally required prior to applying lining or insulation do not need to be performed prior to this test.

6.13.2 Procedure

The tank shall be hydraulically tested.

If the liquid/gas tank is provided with compartments, in addition to hydraulic testing, each compartment shall be tested with the adjacent compartments empty and at atmospheric pressure.

The test pressure shall be measured at the top of the tank or compartment with the tank container in its normal position. The test pressure shall be maintained for as long as is necessary to enable a complete examination of the tank and its fittings to be made, but in any case for not less than 30 min.

Relief devices, where fitted, shall be rendered inoperative or removed and the apertures suitably closed, for the purpose of this test.

The pressure at which the tank is tested shall be selected with regard to the intended use of the tank, in accordance with the requirements of 5.1.6.

This pressure determines the type code designation of the tank container in accordance with ISO 6346

6.13.3 Requirements

During the test, the tank shall show no leakage. On completion of the test, the tank container shall not show leakage or permanent deformation or abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

7 Identification and marking

7.1 The marking requirements of these tank containers shall be in accordance with the principles presented in ISO 6346 for the identification and marking of freight containers.

7.2 At least the following data allowing tank identification shall be permanently attached to the tank in a readily accessible position. These data shall be permanently marked by stamping, embossing or other means and shall not be painted so as to obscure the markings:

- a) date of initial hydraulic test, year and month;
- b) test pressure, in kilopascals or bars;
- c) maximum allowable working pressure, in kilopascals or bars;
- d) total capacity, in litres;
- e) date of periodic inspection and test, year and month;

7.3 As far as possible, the data plate shall include the information required by the competent authorities, thus reducing to a minimum the number of separate plates required. All data plates should be located as close to one another as possible.

If any of the required data is included on other data plates, it does not need to be duplicated in order to satisfy the requirements of this document.

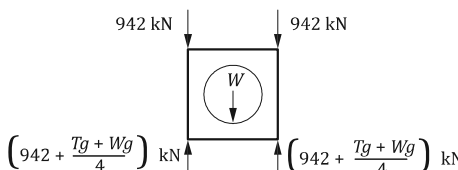
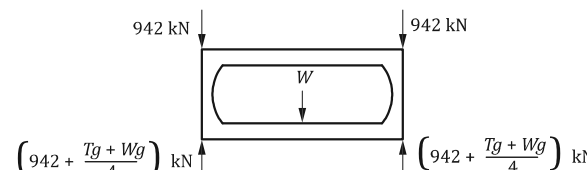
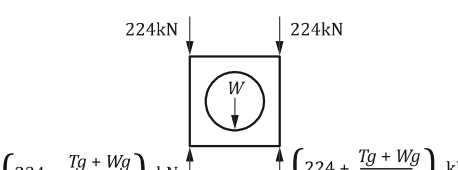
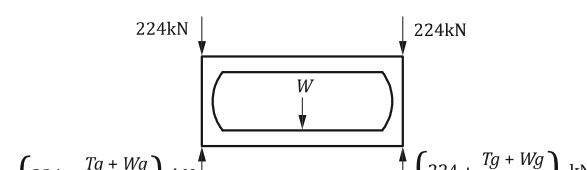

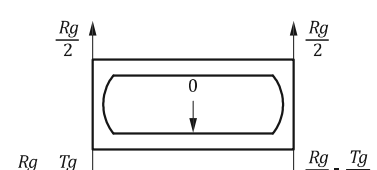

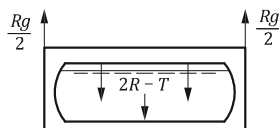
Annex A (normative)

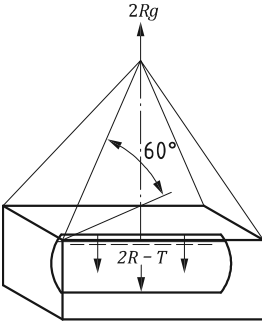



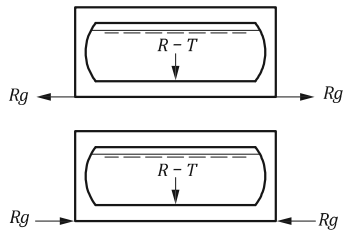
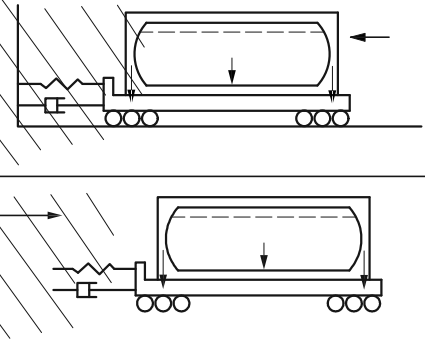
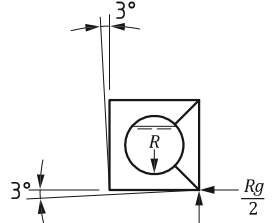
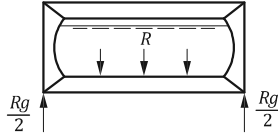
Diagrammatic representation of capabilities appropriate to all types and sizes of tank containers, except where otherwise stated


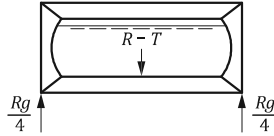
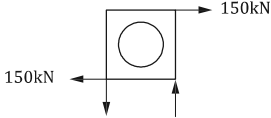
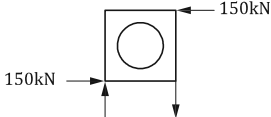




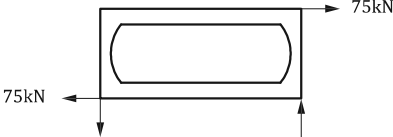
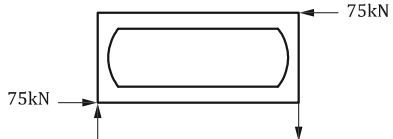


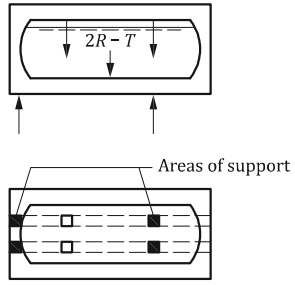

The externally applied forces shown below are for one end or one side only. The loads shown within the containers represent uniformly distributed internal loads only, and such loads are for the whole container.






The figures in this annex correspond to the tests described in 6.2 to 6.12 only where marked.

NOTE Definitions of R , P , T and W are given in 6.1.1.

| Figure No. | End elevations | Side elevations |
|--|--|---|
| A.1 | Stacking Test No 1  |  |
| Not applicable to 1 D and 1 DX tank containers | | |
| A.1.A | Stacking Test No 1  |  |
| Applicable to 1D and 1DX tank containers only | | |
| A.2 | Top lift  |  |
| A.3 | Top lift Test No 2  |  |
| Not applicable to 1D and 1DX containers | | |

| Figure No. | End elevations | Side elevations |
|---|--|---|
| <p>A.4</p> <p>Top lift Test No 2</p> |  <p>Applicable to 1D and 1DX tank containers only</p> | |
| <p>A.5</p> <p>Bottom lift Test No 3</p> |  |  <p>Applicable to all tank containers</p> |
| <p>A.6</p> <p>External restraint (longitudinal) Test No 4</p> <p>Applicable to all tank containers</p> |  |  |
| <p>A.7</p> <p>Internal restraint (longitudinal) dynamic Test No 5</p> |  | |
| <p>A.8</p> <p>Internal restraint (lateral) Test No 6 [see 6.7.2 a)]</p> |  |  |

| Figure No. | End elevations | Side elevations |
|--|--|---|
| A.9 | Internal restraint (lateral) Test No 6 [see 6.7.2 b)]  |  |
| Tank-frame connections through bottom structure only | | |
| A.10 | Rigidity (transverse) Test No 7  | Applicable to all tank containers except 1D and 1DX |
| A.11 | Rigidity (transverse) Test No 7  | |
| A.12 | Lashing/securement  | |
| A.13 | Lashing/securement  | |
| A.14 | Lashing/securement  | |
| A.15 | Lashing/securement  | |
| A.16 | Rigidity (longitudinal) Test No 8 Applicable to all tank containers except 1D and 1DX |  |
| A.17 | Applicable to all tank containers except 1D and 1DX |  |
| A.18 | Load-transfer area tests   |  |
| A.19 | Lashing/securement (This type of leading is not permissible except as applied in Clause 4). |  |

| Figure No. | End elevations | Side elevations |
|--------------------------|--|---|
| A.20 | Lashing/securement |  |
| Optional features | | |
| A.21 | Walkways Test No 10 300kg (660lb) per specified area  Applies to all tank containers (where walkways are provided) |  |
| A.22 | Ladders Test No 11 200kg (440lb) on any rung  Applies to all tank containers (where ladders are provided) |  |

Annex B (normative)

Dynamic longitudinal impact test

B.1 Test sample

Ensure the tank container under test (hereafter referred to as container-under-test) is representative of the tank container design for which conformity confirmation is being sought (design type). Permitted design variations are:

- a) a reduction of 10 % or an increase of 20 % in capacity (resulting from variations in diameter and length);
- b) a decrease in maximum gross mass;
- c) an equal or greater thickness, independent of design pressure and temperature;
- d) a change to the grade of material of construction provided that the permitted yield strength meets or exceeds that of the tested container;
- e) a change of location or a modification to nozzles and manways.

B.2 Test apparatus

B.2.1 Test platform

The test platform may be any suitable structure having securing devices in accordance with ISO 1161, which is capable of achieving and sustaining without permanent damage the prescribed shock severity with the container-under-test mounted securely in place. The test platform shall be:

- a) configured so as to allow the container-under-test to be mounted as close as possible to the impacting end;
- b) fitted with four securing devices in good condition;
- c) equipped with a cushioning device for the purpose of achieving a suitable duration of impact.

B.2.2 Impact creation

The impact may be created by:

- a) the test platform striking a stationary mass; or
- b) the test platform being struck by a moving mass.

When the stationary mass consists of two or more railway vehicles connected together, each railway vehicle shall be equipped with cushioning devices. Free play between the vehicles shall be eliminated and the brakes on each of the railway vehicles shall be applied.

B.2.3 Measuring/recording system

B.2.3.1 General

Unless otherwise specified in this document, the measuring system shall comply with ISO 6487.

B.2.3.2 Apparatus

B.2.3.2.1 Two accelerometers, with a minimum amplitude range of 200 *g*, a maximum lower frequency limit of 1 Hz and a minimum upper frequency limit of 3 000 Hz and a resonant frequency of at least five times the sampling frequency.

Each accelerometer shall be rigidly attached to the outer end or side face of the two adjacent bottom corner fittings closest to the impact source, and aligned so as to measure the acceleration in the longitudinal axis. The preferred method is to attach each accelerometer to a flat mounting plate by means of bolting and to bond the mounting plates to the corner fittings.

B.2.3.2.2 A method of measuring the impact velocity.

B.2.3.2.3 An analogue-to-digital data acquisition system, capable of recording the shock disturbance as an acceleration versus time history at a minimum sampling frequency of 1 000. Aliasing shall not exceed 1 %, which can require the incorporation of an anti-aliasing filter into the data acquisition system.

B.2.3.2.4 A method of permanently storing in electronic format the acceleration versus time histories so that they can be subsequently retrieved and analysed.

B.2.4 Procedure

The container under test shall be filled with a quantity of water or any other non-pressurized product to approximately 97 % volumetric capacity, ensuring that it is not pressurized during the test. However, if for reasons of overload it is not possible to fill to 97 % of the capacity, then the test mass of the container (tare and product) shall be as close as possible to *R*. Measure and record the as-tested payload mass.

NOTE Filling can be undertaken before or after mounting on the test platform.

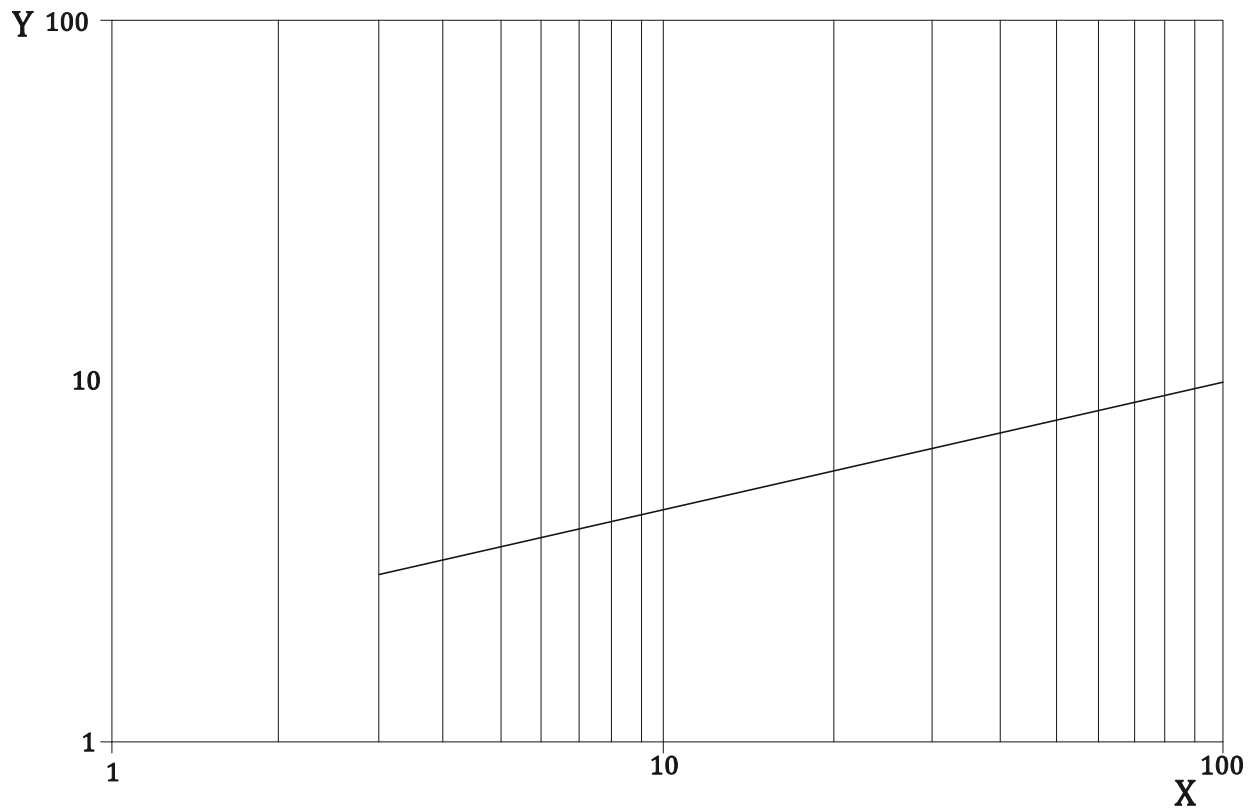
The container under test shall be placed on the test platform as close as possible to the impacting end, with the container end considered to be more vulnerable to impact damage facing the point of impact.

All four bottom corners of the container shall be locked in position by means of the corner fittings restraining movement in all directions.

Create an impact (B.2.2) such that for a single impact the as tested SRS at both corner fittings equals or exceeds the minimum SRS shown in Figure B.1 at all frequencies within the range 3 Hz to 100 Hz.

NOTE Repeated impacts can be required to achieve this result.

Examine the container under test for evidence of any faults and record the result.

**Key**

X frequency, Hz
Y acceleration, g

Figure B.1 — Minimum SRS curve (5 % damping)

Formula (B.1) is used for generating the above minimum SRS curve:

$$acc = 1,95 f^{0,355} \quad (B.1)$$

where

acc is the acceleration;

f is the frequency.

Table B.1 — Tabular representation of some data points for the minimum SRS curve in Figure B.1

| Frequency Hz | Acceleration g |
|-----------------|---------------------|
| 3 | 2,88 |
| 10 | 4,42 |
| 100 | 10,0 |

B.2.5 Analysis/processing of data

B.2.5.1 Data reduction system

Reduce the acceleration time history data from each channel to the shock response spectrum, ensuring that the spectra are presented in the form of equivalent static acceleration plotted as a function of frequency. The maximum absolute value acceleration peak is recorded for each of the specified frequency break points, thus producing what is commonly referred to as the maximal acceleration shock response spectrum.

The data reduction follows the following criteria:

- if required, the corrected impact acceleration time history data shall be generated using the procedure outlined in B.2.5.2;
- the time-history data shall comprise the period commencing 0,05 s prior to the start of the impact event and the 2,0 s thereafter;
- the analysis shall span the frequency range of 2 Hz to 100 Hz with a minimum of 1/30 octave break points. Each break point, or bin in the range shall constitute a natural frequency; and
- a damping ratio of 5 % shall be used in the analysis.

Calculate the test shock response curve data points as described below. For each frequency bin:

- calculate a matrix of relative displacement values, KK_i , using all data points from the shock input acceleration time history using [Formula \(B.2\)](#):

$$\xi_i = -\frac{\Delta t}{\omega_d} \sum_{k=0}^i \ddot{X}_k e^{-\zeta \omega_n \Delta t (i-k)} \sin[\omega_d \Delta t (i-k)] \Delta t (i-k) \quad (\text{B.2})$$

where

Δt is the time interval between acceleration values;

ω_d is the damped natural frequency = $\omega_n \sqrt{1-\xi^2}$;

i is the integer number, varies from 1 to the number of input acceleration data points;

k is the parameter used in summation which varies from 0 to the current value of i ;

\ddot{X}_k is the k th value of acceleration input data;

ζ is the damping ratio;

ω_n is the undamped natural frequency, in rad/s.

- Calculate a matrix of relative accelerations, $\ddot{\xi}$, using the displacement values obtained in step 1) in [Formula \(B.3\)](#):

$$\ddot{\xi} = 2\zeta \omega_n \Delta t \sum_{k=0}^i \ddot{X}_k e^{-\zeta \omega_n \Delta t (i-k)} \cos[\omega_d \Delta t (i-k)] + \omega_n^2 (2\zeta^2 - 1) \xi_i \quad (\text{B.3})$$

- retain the maximum absolute acceleration value from the matrix generated in step 2) for the frequency bin under consideration. This value becomes the shock response spectrum (SRS) curve point for this particular frequency bin. Repeat step 1) for each natural frequency until all natural frequency bins have been evaluated;

h) generate the test shock response spectrum curve.

B.2.5.2 Method for scaling measured acceleration versus time history values to compensate for under or over mass containers.

Where the sum of the as-tested payload mass plus tare mass of the container under test is not the maximum rated mass of the container under test, apply a scaling factor to the measured acceleration time histories for the container-under-test as follows.

Calculate the corrected acceleration-time values, $acc(t)_c$, from the measured acceleration time values, using [Formula \(B.4\)](#):

$$acc(t)_c = acc(t)_m \times \frac{1}{\sqrt{1 + \frac{\Delta M}{M_1 + M_2}}} \quad (B.4)$$

where

$acc(t)_m$ is the actual measured acceleration-time value;

M_1 is the mass of the test platform, without the container under test;

M_2 is the actual test mass (including tare) of the container under test;

$\Delta M = R - M_2$ where R is the maximum rated mass (including tare) of the container under test.

The test SRS values shall be generated from the $acc(t)_c$ values.

B.2.6 Defective accelerometer signal

In the case where the acquired signal is defective, the test may be validated with the SRS from the functional accelerometer after three consecutive impacts provided that the SRS from each of the three impacts meets the minimum requirements.

B.2.7 Optional test method

In the case where the SRS curves obtained have correct features but remain below the minimum SRS curve, the test may be validated if three successive impacts are performed as follows:

- first impact at a speed higher than 90 % of the critical speed;
- second and third impact at a speed higher than 95 % of the critical speed.

In addition, all of the following conditions shall be met:

- a) a critical speed shall already have been established for the container length. The critical speed corresponds to the speed where the cushioning devices reach their maximum travel and energy absorption capacity, beyond which it has been determined that the minimum SRS curve is normally obtained or exceeded;
- b) the critical speed has been established after at least five documented tests using five different tank containers for the container length. Each of the tests shall have been performed using the same equipment, measuring system and procedure;
- c) the design of the container under test is significantly different from any other tank container having been successfully subjected to the dynamic longitudinal impact test.

B.2.8 Recording of data

The following data, as a minimum, shall be recorded in the application of this procedure:

- a) the date, time, ambient temperature, and location of the test;
- b) the tank container tare mass, maximum rated mass, and as-tested payload mass;
- c) the tank container manufacturer, tank type, registration number if applicable, certified design codes and approvals if applicable;
- d) the test platform mass;
- e) the impact velocity;
- f) the direction of impact with respect to tank container;
- g) for each impact, an acceleration versus time history for each instrumented corner fitting.

.....

Bibliography

- [1] ISO 8323, *Freight containers — Air/surface (intermodal) general purpose containers — Specification and tests*
- [2] IEC 60068-2-27, *Environmental testing — Part 2: Tests — Test EA and guidance: Shock*



ICS 55.180.10

Price based on 25 pages

© ISO 2019 – All rights reserved